



CMR Electrical Ltd
Bolton House
Five Chimneys Lane
Hadlow Down
East Sussex
TN22 4DX
Tel: 01825 733600


Water Leak Detection Sensor Type DTS for Drip Trays

Installation and Operation Manual



Installation

The detection sensor is susceptible to damage and should not be fitted to areas where it is likely to be walked on. Place the sensor on the drip tray so that the rubber feet are in contact with the tray.

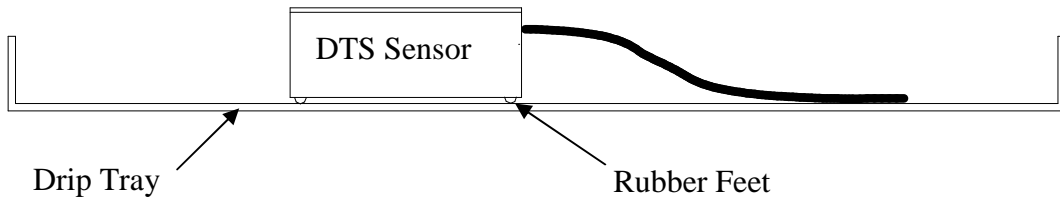

Sensor wiring



The signal cable should be terminated between the sensor and the main Alarm/BMS in the following manner.

Connection to Signal Cable	Signal cable wire colour
+VDC/AC	Red
0VDC/AC	Blue
Contact N/O	Yellow
Contact N/O	Black

IP Rating

Rated at IP68, the sensor is fully potted and therefore can be submerged in water without damage.

Size

