




CMR Electrical Ltd  
Bolton House  
Five Chimneys Lane  
Hadlow Down  
East Sussex  
TN22 4DX  
Tel: 01825 733600

## Liquid Leak Detection Sensor Type OSP


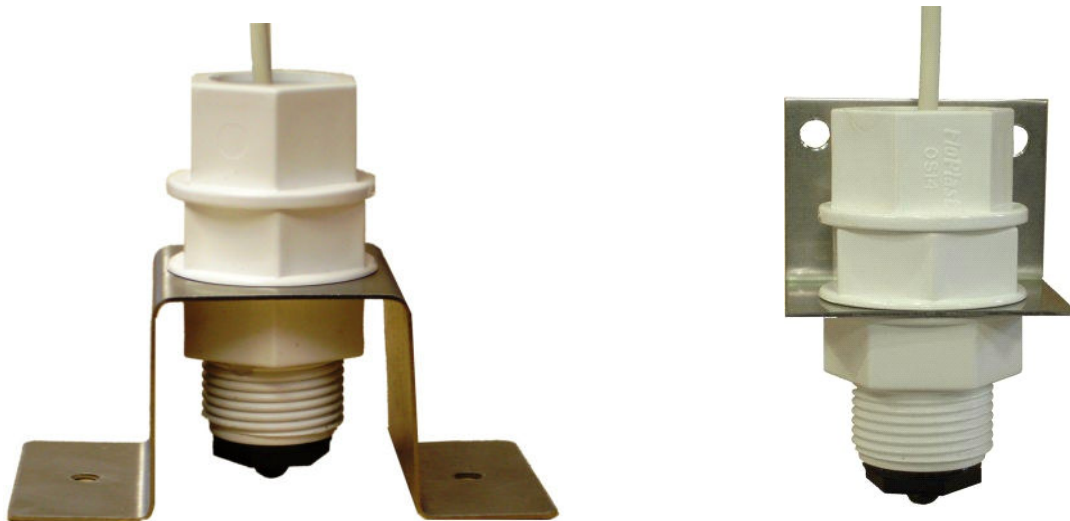


The sensor has been designed to detect the presents of any liquid including water, fuel oil etc. and energise an internal relay to provide a signal to existing alarm systems, Building Management Systems or SMS messaging systems.

Stainless Steel brackets are available to allow the sensor to be Wall Mounted, Floor Mounted or without the bracket screwed directly into a fitting to allow monitoring of bunded tanks or pipes.

The mode of operation is the principle of total internal reflection. An LED and photo-transistor are housed in a plastic (Polysulfone) dome. When no liquid is present, light from the LED is internally reflected from the dome to the photo-transistor. When a liquid covers the dome, the effective refractive index at the dome-oil boundary changes allowing some light from the LED to escape. Thus the amount of light received by the photo-transistor is reduced indicating the presents of a liquid.


Sensors can be connected together to give a common alarm within an area or connected individually to provided exact location of a leak.

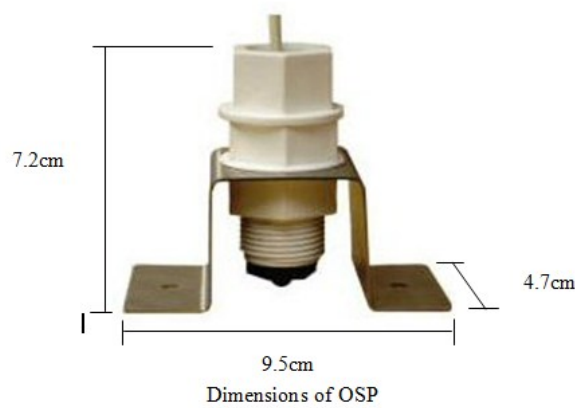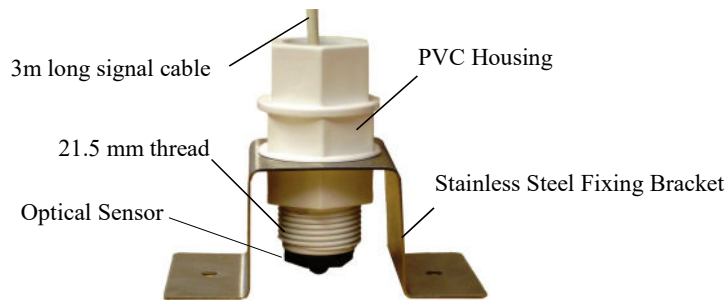

**NOTE;**

*This sensor can sometimes not work properly on shiny or mirrored surfaces. This can be resolved by dulling the area underneath the sensor's bulb using wire wool, paint or sticky*

**Internal wiring**

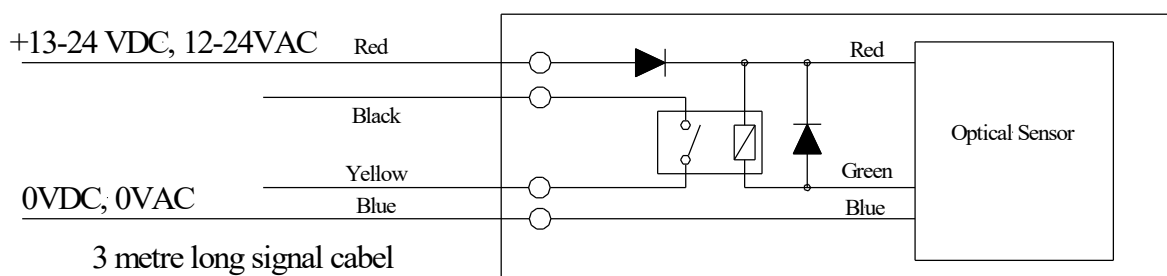

**Specification**

Housing type  
Size excluding bracket  
Colour  
Input power  
Power Consumption  
Connections to Sensor  
Relay contact  
Ingress Protection Rating

PVCU Plastic  
75mm High x 38mm diameter  
White  
12 to 24 VAC or 13 to 24VDC  
0.84W @ 27.1VAC, 0.5W @ 24VDC  
3 metre long 4 core signal cable  
Normally Open , (close in alarm ) 1 amp 30VDC volt free contact  
IP65